


Dimensions :- Metric

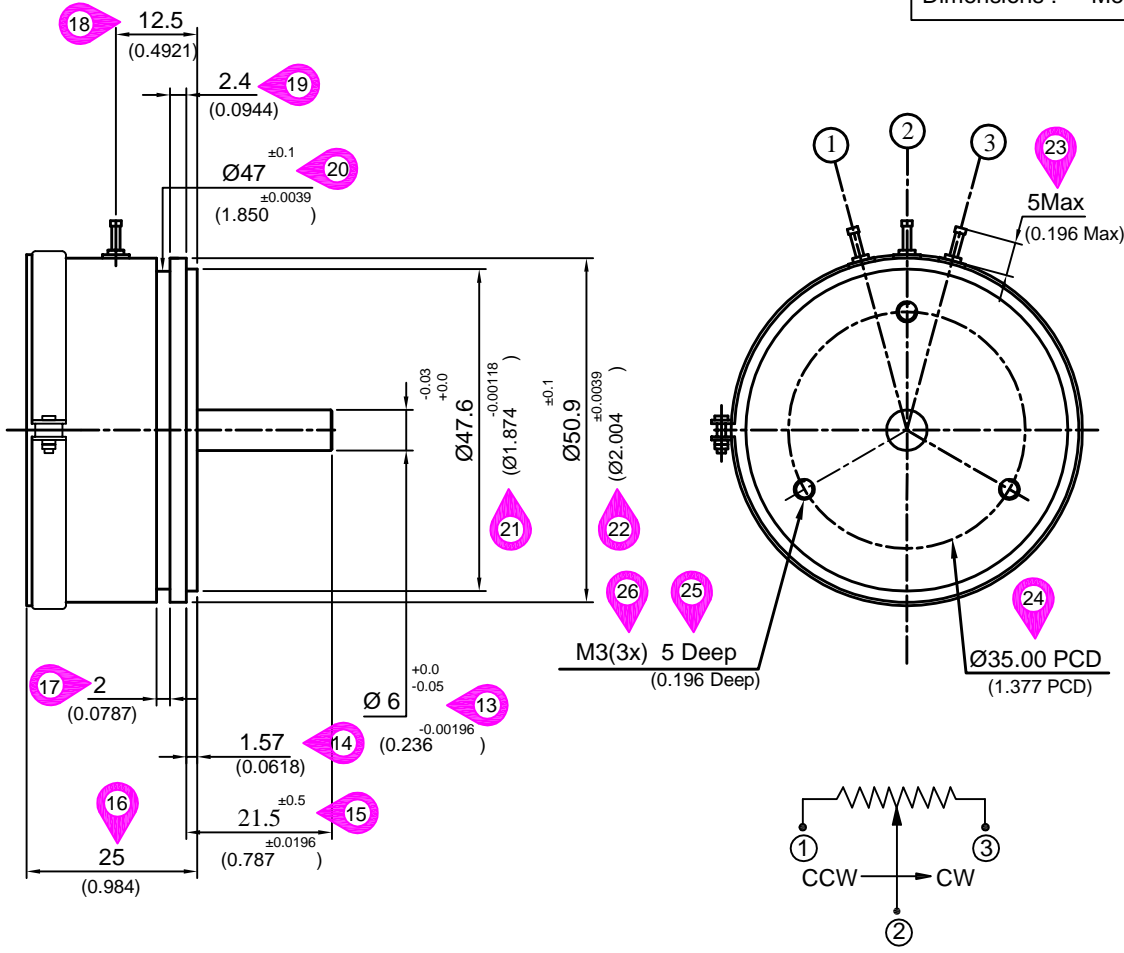

- Features:-**
1. Conductive plastic long life resistance element.
 2. Anodized Aluminium precision machined body.
 3. Precious metal high technology wiper gives noise free output.

ELECTRICAL CHARACTERISTICS	UNITS	VALUE
Resistance Element...	--	Conductive Plastic
Resistance value...	Ohms	1k,2k,5k,10k. 01
Standard Resistance Tolerances...	%	±20 02
Standard Independent Linearity Tolerances..(IEC 393)...	%	±0.5 03
Electrical angle...	Degrees	350° ± 3° 04
Resolution...	--	Essentially Infinite
Temperature Coefficient of Resistance (TCR)...	ppm/deg C	±400
Power Rating @ 70° C...	Watts	3 05
Insulation Resistance @ 500 Vdc...	M Ohms	1000 06
Dielectric Strength @ 50 Hz...	V ac	500 07
Maximum Wiper current.....	mAmps	1
Short time wiper current 10 sec....	mAmps	10
End Voltage % of Applied voltage.....	%	0.5 08

MECHANICAL CHARACTERISTICS :-		
Rotation (Mechanical Angle).continuous	Degrees	360° 09
Bearing Type.....	--	Ball Bearing
Torque... Starting.....	Nmm (Oz inch)	5 (0.708) 10
Torque... Running.....	Nmm (Oz inch)	4 (0.1574)
Axial Play	m.m.(inch)	0.1 (0.00393) 11
Radial Play	m.m.(inch)	0.1 (0.00393) 12

ENVIRONMENTAL CHARACTERISTICS :-		
Operating Temperature.....	Degrees C	-40 to +105

PERFORMANCE :-		
Rotational Life (shaft Revolutions).....	Nos.	5,000,000

MATERIALS OF CONSTRUCTION:-		
Housing.....	--	Aluminum Anodized
Shaft.....	--	Stainless Steel
Terminals.....	--	Brass, Gold plated stud type terminal

Soldering Recommendation :- Use soldering Iron at 350° C for 3 second maximum. Clean the soldered pads with Isopropyl alcohol after soldering. Continuous improvements are being made for enhancing performance for customer benefit in product design & process. The product supplied may be slightly different than described by above specifications

Uni-Automation (I) Pvt Ltd
Tel/Fax: +91-(020)-24420890
www.uniautomation.com


SERVO POTENTIOMETER CONDUCTIVE PLASTIC

MODEL 50CP (602)

First Issue : 2016/05/02 Scale:- 1:1

Tolerances
DIN-ISO 2768-1 (1991-06)
(Tolerance class-medium)

UAPL PART NO
129602



CUSTOMER DRAWING REF NO

CUSTOMER : UAPL STANDARD

REV - 01
NEW VERSION
SHEET
1of1